

Products and Systems for the Electronics Industry

Automotive, Industrial and Consumer Goods



We Enable Energy

As one of the oldest industrial companies in Switzerland, founded in 1803, we focus on products and systems for power generation, transmission and distribution, rotating machines and mechanical engineering. Von Roll is the global market leader for insulation products and the only company to offer the complete range of insulation products, composites, consulting, tests and services for the electrotechnical industry.

For more than 100 years, we have been making outstanding contributions to this market, developing a number of highly innovative products that have enabled both steady increases in power output and smaller and more compact machines.

As our customer, you will enjoy the following benefits:

- » One single source for all insulating materials
- » Thorough expertise from power generation and transmission to its efficient utilization
- » Proven compatibility for system components
- » Testing at Von Roll of both materials and systems
- » Consulting for applications and technologies
- » Training in insulation materials and systems

We offer you global in-depth know-how and are happy to support you in fulfilling your needs. In doing so, we tailor our products to your specific requirements to achieve the results you are looking for. We develop our customized solutions together with you to achieve the best suited resin system for your application, equipment with the expected performance.



Von Roll provides an extensive range of systems designed to insulate and protect electrical and electronic components.

The product range has properties excellently suited to:

- » Overmolding, encapsulation, impregnation
- » Bonding, sealing, covering, filling up empty spaces
- » Protecting against moisture, shocks and vibrations, harsh environments
- » Increasing thermal dissipation

In accordance with industrial environmental programs and directives, all grades are free of halogens and volatile organic compounds (VOCs). Formulations comply with the Restriction of Hazardous Substances (RoHS) Directive. Several systems are UL approved.

Our products are manufactured in our global production network with sites in the USA, France, Italy, India and China, and are sold in more than 80 countries.



Environment & safety

Von Roll's safe, green and clean strategy focusing on products for the future:

- » Safe for the users - No risk to work with the products
- » Green for the planet - Low to no impact on air pollution or global warming
- » Clean for the local environment - Low to no wasted chemicals




Processes for electronic insulation and protection

Atmospheric Potting

Atmospheric potting is used when easy workability and a simple process are needed, and the geometry of the potted parts is not too complex. This process requires mainly a low mix viscosity and an easy-to-handle mixing ratio between resin and hardener, since the mixing is often done manually.


Vacuum Potting

Vacuum potting is the standard casting process. Vacuum potting is often combined with slightly higher process temperatures to enable a smooth and stable process – the main benefits for vacuum casting is the air-free potting, better wetting and adhesion on the substrates and a higher stability in mixing quality.

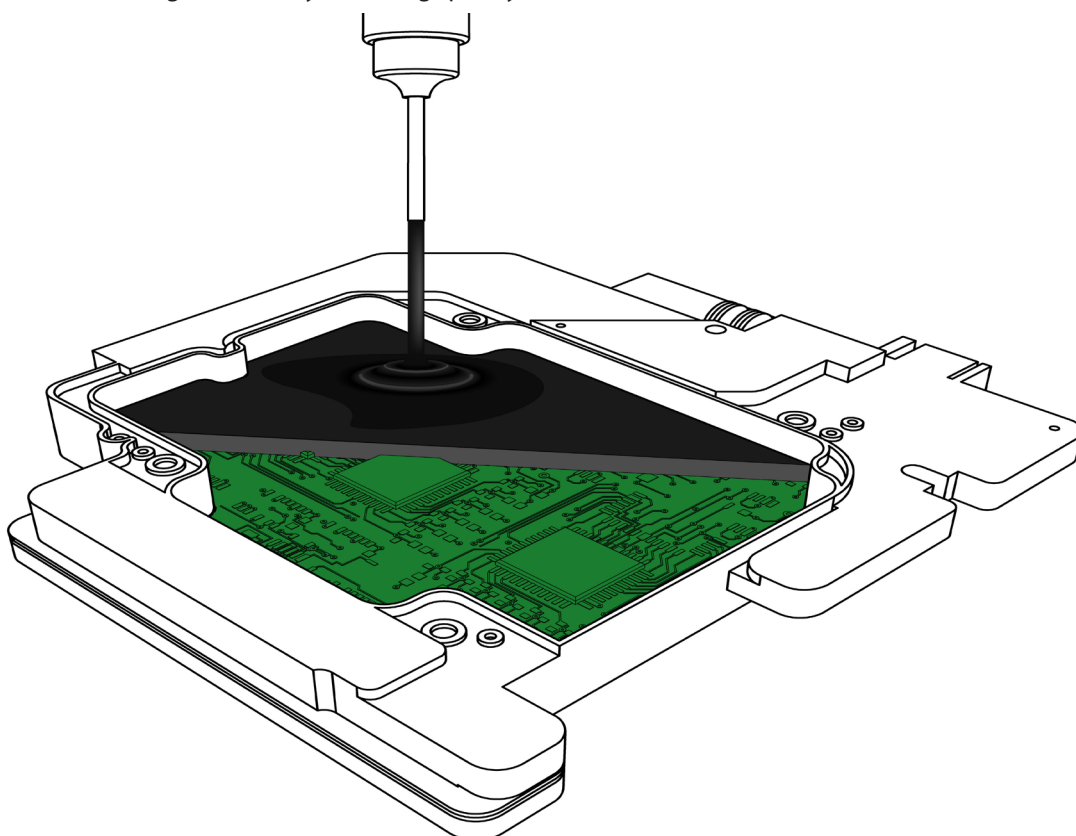


Atmospheric Dipping

Dipping is the most common impregnation process for any kind of low-voltage electrical components, such as motors, generators or transformers. It is highly versatile and seems very easy. Nevertheless, the resin choice is always crucial due to environmental constraints (smell, fire risks, irritation, toxicity and more), process issues (stability, viscosity, reactivity, productivity, etc.) and technical properties (thermal class, chemical resistance, electrical properties, bonding strength, etc.).

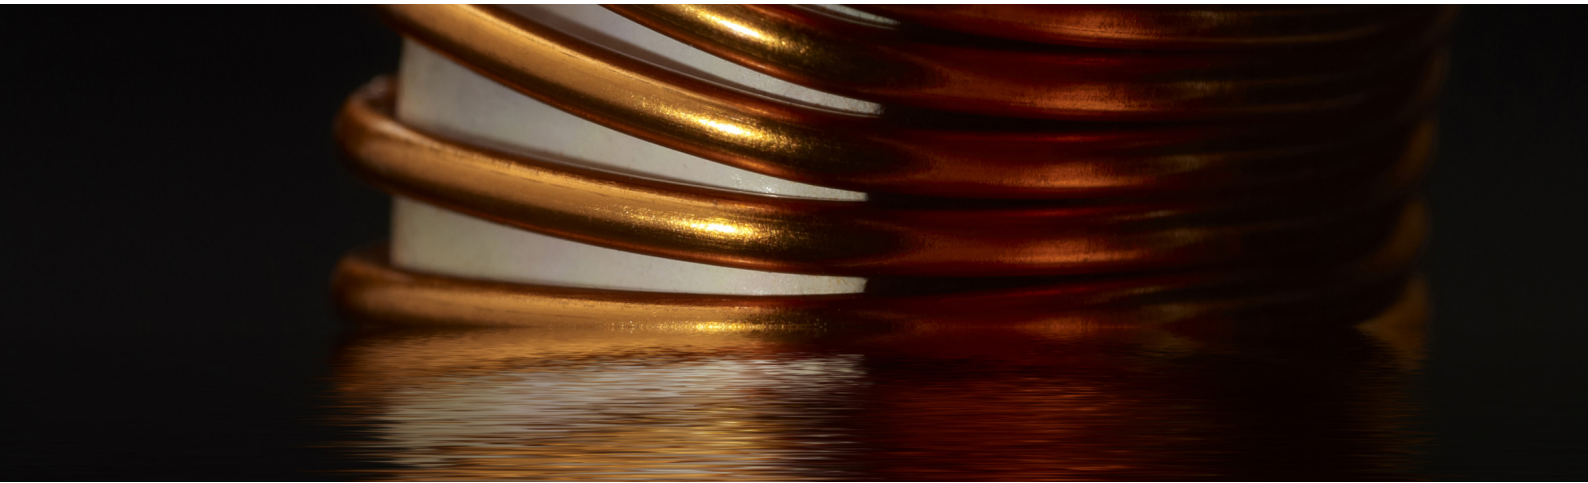


Spray - Conformal Coating

Coating serves mainly as protection of fragile or exposed components. The selection of the best-suited coating process depends on the required varnish and its properties. We offer several coatings with different colors and chemical properties that are ideally suited for all kind of processes (Brushing, Spraying or Dipping).

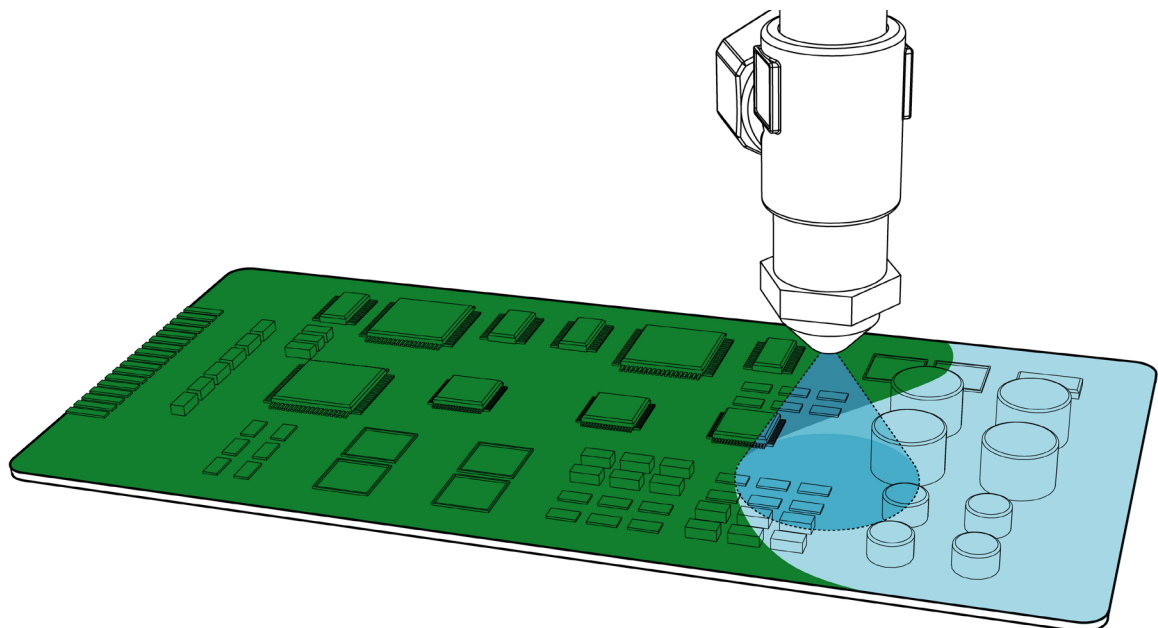



Automotive

Capacitors	Battery Systems		Inverter & Converter	Sensors & Electronic Control Units (ECU's)		Ignition Coils	Charging Systems
Potting	Potting	Conformal Coating	Potting	Conformal Coating	Potting	Potting	Potting
Dolphon® 1138	Dolphon® 1138	Synthite® AC 43	Damival® 13518	Synthite® AC 46-1	Dolphon® 1114	Dolphon® 1037	Dolphon® 1114
Damival® 13518	Dolphon® 1123	Damitron® UVC-80	Damival® 13553	Damitron® UVC-80	Damival® 13682		Damival® 13682
Damival® 13524	Damival® 13682	Synthite® AC 46-1	Dolphon® 1123	Synthite® AC 43	Damival 13522		Dolphon® 1138

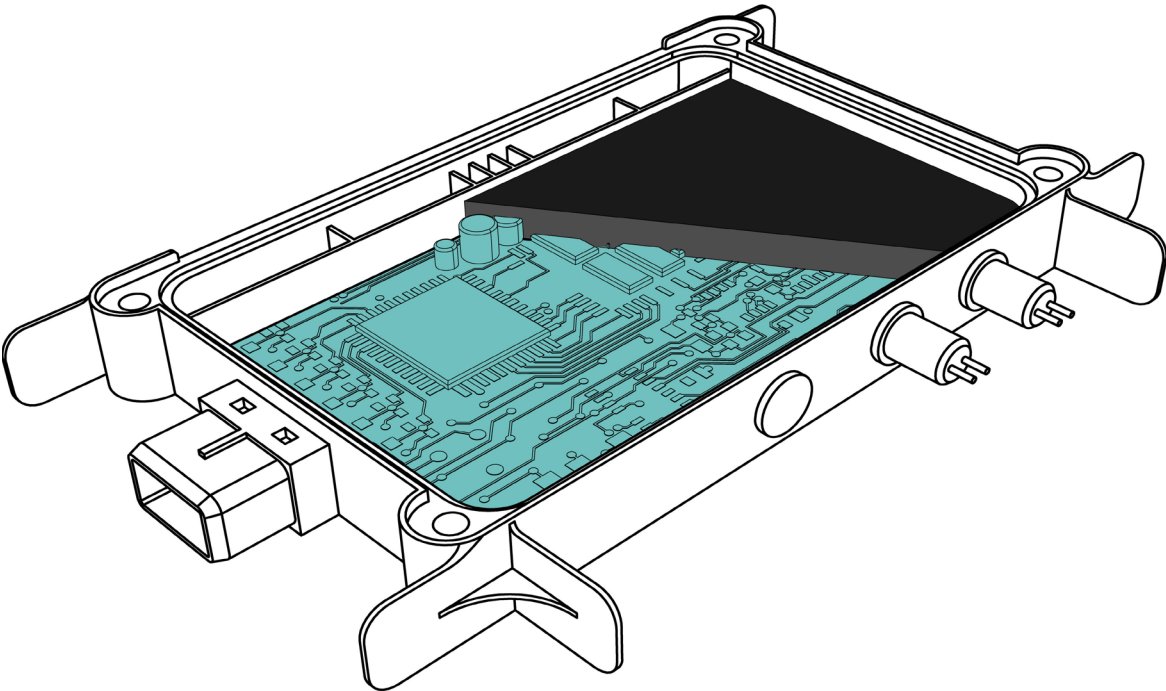



More technical information on page 10-11.

Industrial electronics

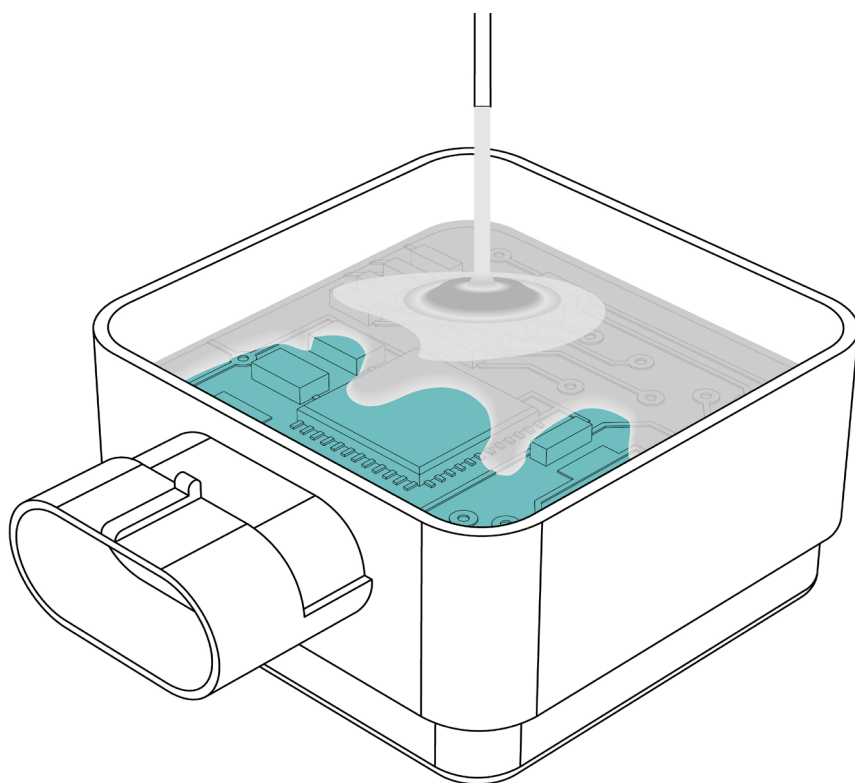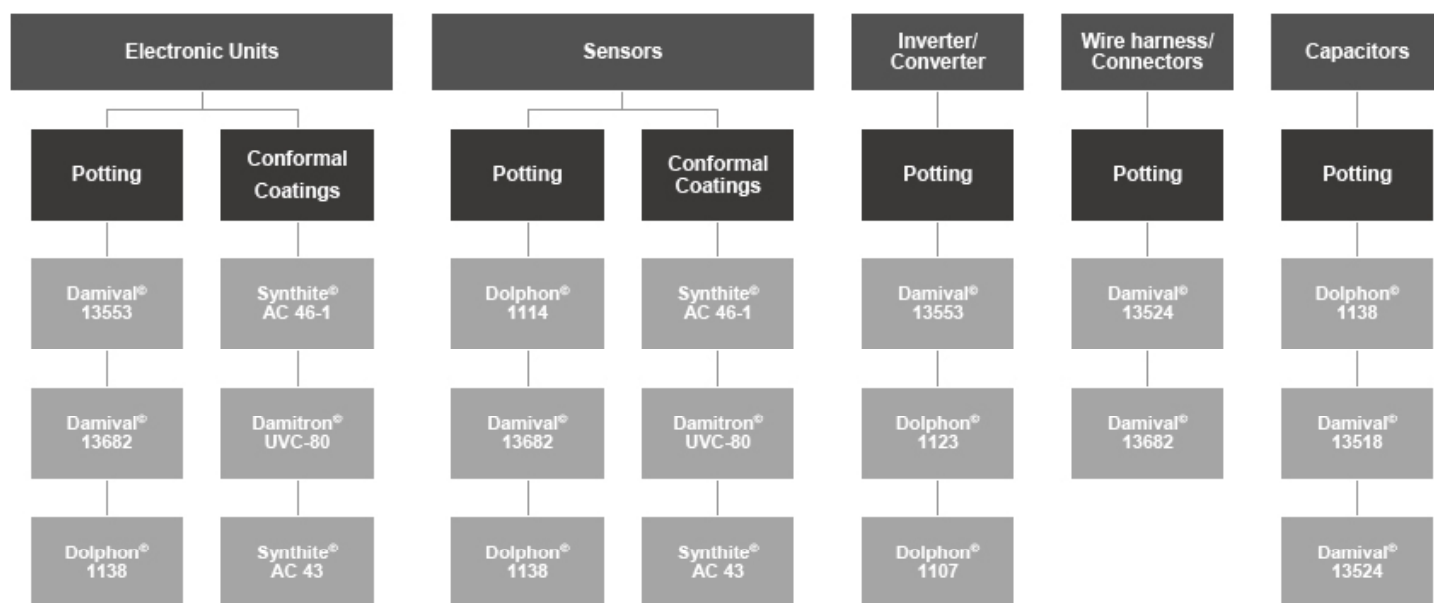

More technical information on page 10-11.

Consumer goods

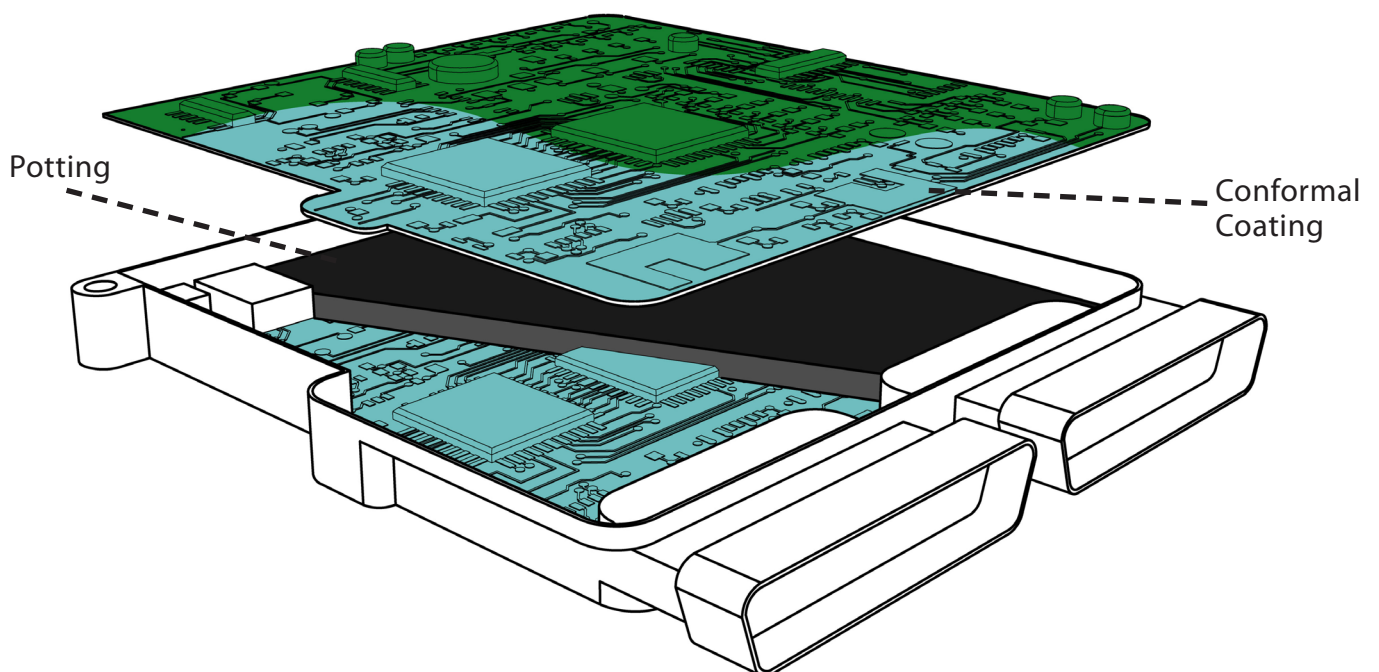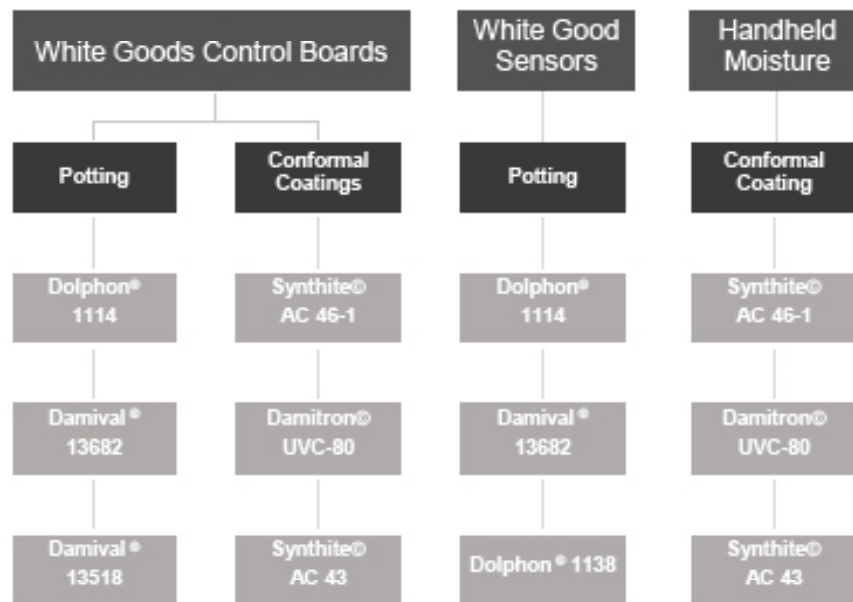

More technical information on page 10-11.

Potting system overview

Epoxy Potting Systems

Epoxy potting chemistry shows in general very good thermal properties and superior adhesion to metal and duroplastic materials. Due to the latency of the systems a long and secured processing time is given. Fast curing is possible as well as fast curing at elevated temperatures. The typical operating temperature is very wide, ranging from -60°C to 180°C for ambient curing epoxy systems and wider more broad when using hot curing epoxy systems. Typical applied processes are atmospheric and vacuum potting.


Polyurethane Potting Systems

Polyurethane potting chemistry offers many possibilities of use due to the low mix viscosity and easy processing. The adhesion properties are especially good for thermoplastics and duroplastics. In combination with thermoplastic, the polyurethane resin can also be used for large volumes due to the low exothermic reaction. The flexibility and crack resistance at medium and low temperatures make this type of potting resins very suitable for pressure sensitive devices. Typical applied processes are Atmospheric and Vacuum potting.


Polybutadiene Potting Systems

Polybutadiene potting chemistry shows a very high flexibility, and is therefore perfectly suited for materials with different thermal expansion coefficients like metal to plastics encapsulation. The adhesion properties are generally very good on thermoplastics and duroplastics – some types are also usable for metals. The typical operating temperature is very wide, ranging from -60°C to 150°C without showing stress to the potted parts. In many of applications, polybutadiene potting resins can also replace silicones. Typical applied processes are atmospheric and vacuum potting.


Soft potting systems

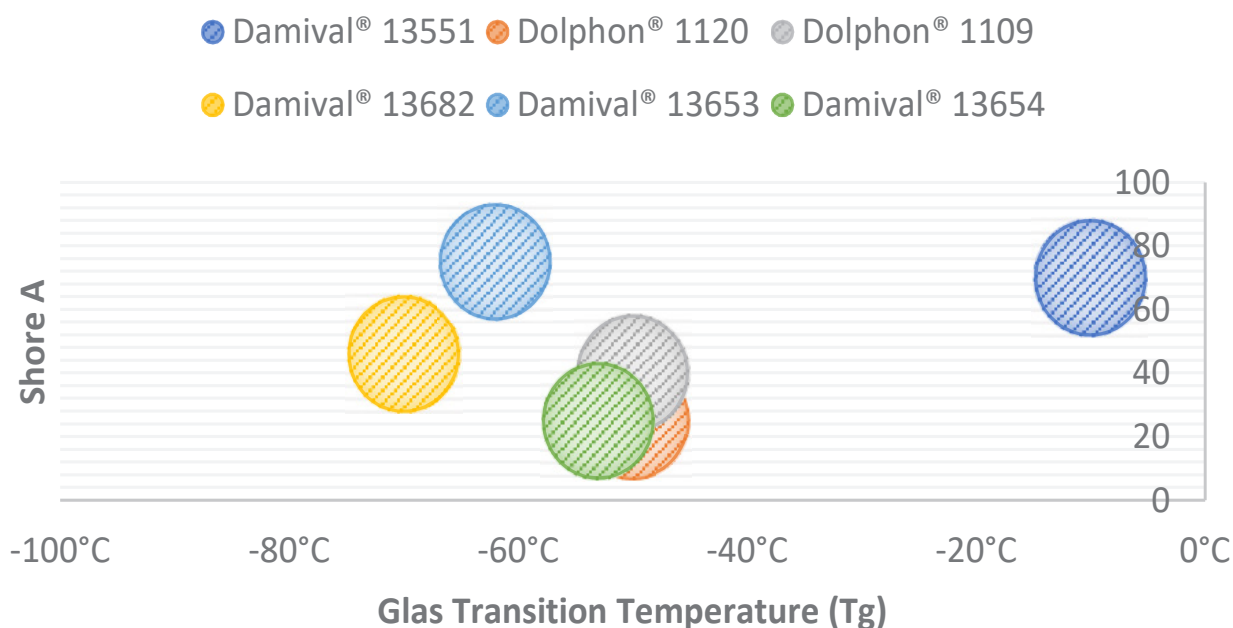

Hard potting systems

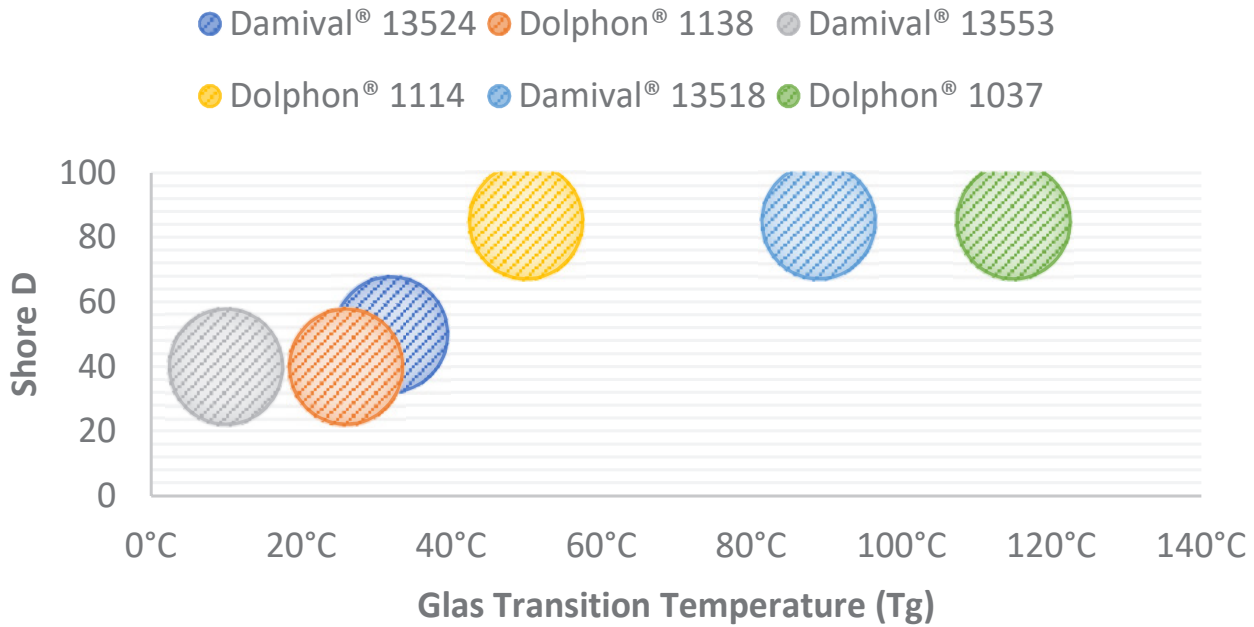

Thermal conductive systems

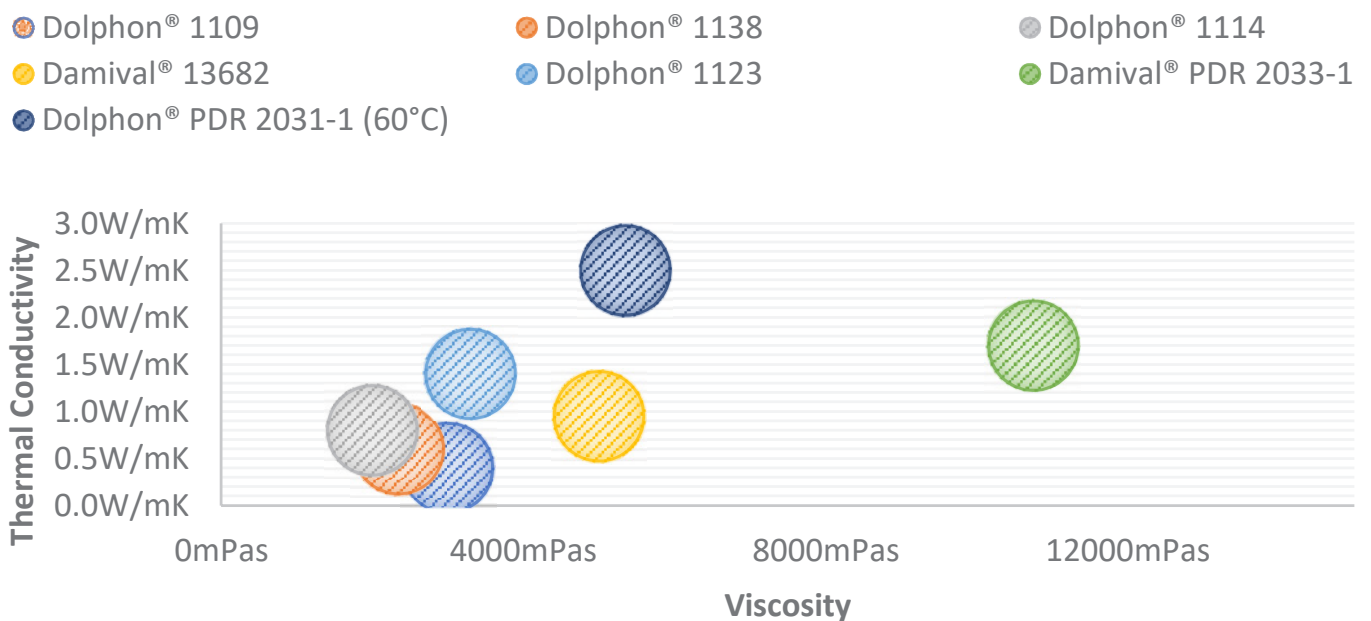

Potting system overview

Product	Chemistry	Hardness	Mix Viscosity	Operating Temperature	Thermal Conductivity	Main Characteristics
Damival® 13524	PU	D50	200mPas	130 °C	0.4 W/mK	Moderate density, cost efficient
Dolphon® 1138	PU	D40	2350mPas	130 °C	0.6 W/mK	Easy to use PU, cost efficient
Damival® 13553	PU	D40	3000mPas	155 °C	0.8 W/mK	Good adhesion & chemical resistance
Damival® 13518	PU	D85	2000mPas	130 °C	0.65 W/mK	UL RTI 120, good chemical resistance
Damival® 13551	PU	A70	2300mPas	130 °C	0.8 W/mK	Good adhesion properties
Damival® 13653	PU	A75	3000mPas	130 °C	0.3 W/mK	High hydrolysis resistance
Damival® PDR 2033-1	PU	A75	10700mPas	130 °C	1.7 W/mK	UL 94V0 3mm, very high thermal conductivity
Dolphon® 1120	PUBD	A25	2000mPas	120 °C	0.2 W/mK	Unfilled & translucent
Dolphon® 1109	PUBD	A40	3500mPas	120 °C	0.4 W/mK	Very low outgassing and good adhesion
Damival® 13681	PUBD	A50	3000mPas	150 °C	0.3 W/mK	Possible alternative to silicone. MDI free. High thermal resistance.
Damival® 13682	PUBD	A46	5000mPas	150 °C	0.95 W/mK	Good allrounder also possible alternative to silicone. MDI free.
Damival® 13654	PUBD	A25	4000mPas	110 °C	0.35 W/mK	Very low hardness & high tear strength
Dolphon® 1114	EP	D85	2000mPas	180 °C	0.8 W/mK	Good thermal shock & crack resistance
Dolphon® 1107	EP	D45	3000mPas	155 °C	0.9 W/mK	Semi-flexible, high resistance against thermal shocks and cycling
Dolphon® 1123	EP	D85	3000mPas	180 °C	1.4 W/mK	Perfect balance between viscosity and thermal conductivity
Dolphon® PDR 2031-1	EP	D90	5300mPas (60 °C)	180 °C	2.2 W/mK	Very high thermal conductivity, low CTE
Dolphon® 1037	EPHC	D85	4500mPas (60 °C)	200 °C	0.7 W/mK	Very good crack resistance
Dolphon® 1220	EPHC	D90	620mPas (90 °C)	200 °C	1.3W/mK	High thermal conductivity, excellent crack resistance, low CTE

PU = Polyurethane Chemistry, EP = Epoxy Ambient Temperature Cure, EPHC = Epoxy High Temperature Cure
 PUBD = Polybutadiene Chemistry, CTE = Coefficient of Thermal Expansion
 MDI = Standard Aromatic Curing Agent for Polyurethane

Most of our systems are recognized via UL.

If you don't find a system which fulfills your demand – please contact our experts!



Conformal coating system overview

Product	Chemistry	Viscosity @25 °C	Operating Temperature	Main Characteristics
Synthite® AC-43	Alkyd-based	50mPas	180 °C	Air drying coating, easy sprayable, high temperature resistant
Synthite® AC 46	Polyurethane	300mPas	130 °C	UL 94 & UL 746E approved, excellent adhesion, superior chemical and abrasion resistance, easy sprayable
Synthite® AC 46-1	Polyurethane	300mPas	130 °C	UL 94 & UL 746E approved, excellent adhesion, superior chemical and abrasion resistance, easy sprayable, No aromatic solvents
Damitron® UVC-80	Polyurethane - UV curable	200mPas	130 °C	Very fast process times due UV-curing, Superior chemical and abrasion resistance, flexible also at low temperatures



Testing and UL

Von Roll has specialized applications labs that are focused on customer needs and requirements. We can process customer parts in the lab by dipping, trickle, roll-through, vacuum-aided dipping or VPI processing methods to produce prototype parts. In the USA, we have a certified UL testing center where we develop and maintain the many Von Roll UL 1446 insulation systems as well as customize systems for customers. Von Roll can provide:

- » tests per UL 1446 standard
- » long thermal aging – full system testing
- » short-term component aging (sealed-tube test)
- » full system testing: GPM/Motorette
- » twisted pair testing (TP)
- » helical coil testing (HC)



Training

We offer a unique program of insulation training, known as Von Roll Corporate University. The objectives of this training are:

- » Better understanding of electrical insulation technology for high- and low voltage rotating machines and up-to-date knowledge on insulating materials and systems.
- » Practical experience in the application of electrical insulating materials.

Special trainings with a particular focus on low-voltage applications are available.

Dates and further information are available in a separate brochure or contact us directly for further information.



Our training courses are attended by customers and partners from around the globe.

We Enable Energy

Von Roll is the sole full-range supplier of materials and systems for the insulation of electrical machines as well as high-performance products for various high-tech industries.



Mica

All materials related to high-voltage insulation. Von Roll's commitment to mica starts with mining and ends with finished tapes.



System components

Producer of integrated and ready-to-install system components for high-voltage electric motors, railway drives and generators.



Cables

Mica tapes for fire-resistant cables. Von Roll provides a wide range of products that are ideally suited to all commonly used standards.



Resins

Impregnation resins for high- and low-voltage, potting resins, casting resins, as well as encapsulating and conformal coatings.



Composites

Engineered materials made from a resin and a support structure with distinct physical, thermal and electrical properties. They can be molded, machined or semi-finished.



Flexibles

Insulating flexible materials for low-voltage applications such as flexible laminates and adhesive tapes.



Ballistic Protection

High-quality systems for armored defense based on thermoset / thermoplastic products in single-use or tailored combinations.



Water

Von Roll BHU Umwelttechnik GmbH provides solutions for process engineering tasks in the field of water and wastewater management.



Testing

Von Roll provides electrical, thermal and mechanical testing of individual materials as well as complete insulating systems.



Training

Von Roll Corporate University provides a training program in high- and low-voltage insulation for its customers.

Please contact us or visit our website www.vonroll.com or www.dolphins.com for further information:

Europe

Von Roll Schweiz AG
Passwangstrasse 20
4426 Breitenbach
Switzerland
P +41 61 785 5111
F +41 61 785 5188
cs.europe.liqu@vonroll.com

Von Roll Deutschland GmbH
Theodor-Sachs-Str. 1
86199 Augsburg
Germany
P +49 821 9020
F +49 821 902 239
cs.europe.lique@vonroll.com

Von Roll Italia s.r.l.
Via Rigolfo 73, Zona Vadò
10028 Trofarello
Italy
P +39 011 649 31 11
F +39 011 649 31 12
cs.europe.liqu@vonroll.com

Von Roll France SA
145, rue de la République
69330 Meyzieu
France
P +33 47 804 5911
F +33 478 31 66 43
cs.europe.liqu@vonroll.com

Americas

Von Roll USA, Inc.
200 Von Roll Drive
Schenectady, NY 12306
USA
P +1 800 654 7652
sales.us@vonroll.com

Von Roll do Brasil Ltda
Rua Vaticano, No. 179
06713-040, Jd. Fontana Cotia, Sao
Paulo
Brazil
P +55 11 4208 5995
F +55 11 4193 6789
cs.south.america@vonroll.com

Asia/Pacific

Von Roll Asia Pte Ltd.
6 Serangoon North Avenue 5 #03-01
Singapore 554910
Singapore
P +65 6556 4788
F +65 6556 4959
cs.asia@vonroll.com

Von Roll India Pvt. Ltd.
15/1/2, 20/1B Kempalinganahalli
NH48, Kunigal Road, Nelamangala,
Taluk, 562 123 Bangalore
India
P +91 93 0129 4816
cs.asia.india@vonroll.com

Von Roll Shanghai Co., Ltd.
Unit C, No.1235, Minqiang Road
Songjiang District
Shanghai, 201612
China
P +86 21 6768 7020
F +86 21 5768 7891
cs.asia.china@vonroll.com